




# Window Patching and Carton Lining Machine

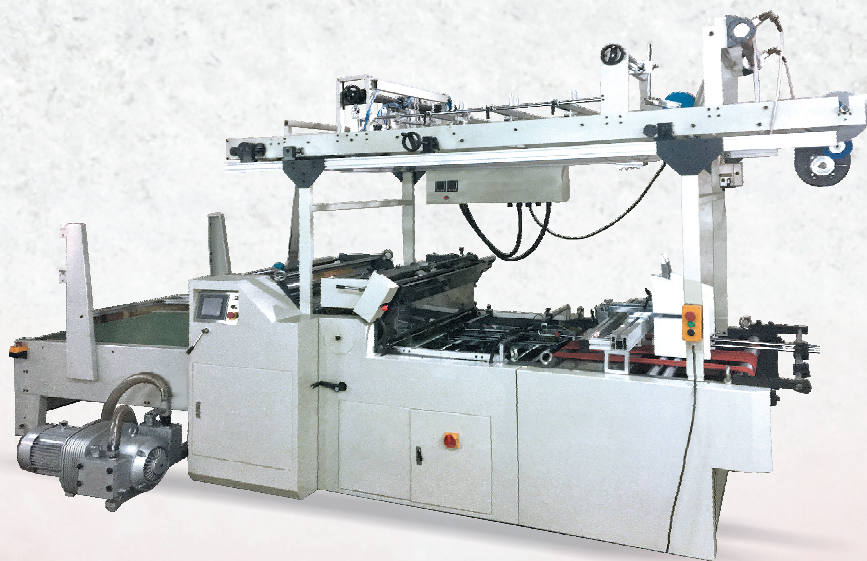

**New Dimension in Flexible Packaging**

[www.slkcg.com](http://www.slkcg.com)

[www.grafikmachinery.com](http://www.grafikmachinery.com)

### Features

- Heavy duty construction
- Maximum speed 120 meter / minute
- Easy to operate, HMI and PLC controlled functions
- Electronic sheet counting system
- Servo motor and sensor assisted feeder control
- Double carton detection for smooth work flow and waste control
- Sliding glue unit for easy setting and cleaning
- Vacuum bed with suction belts and sensor control
- Reel feeding system with tension control system
- Powerfull vacuum cylinder for accurate positioning of foil.
- Quick and precise film cutting through servo motor.
- Sensor controlled heat sealing station for liner cartons

### Optional Features

- Electronic gluing system for liner cartons
- "V" notching and heat creasing for window patching

### Technical Specifications

#### Model WLP1020

Particulars	Minimum	Maximum
Blank Size: W x L	140 x 140 mm	1080 x 650 mm
Tube / Film Size: W x L (cut)	80 x 80 mm	300 x 410 mm
Thickness:		
Blank: – Duplex	200 gsm	500 gsm
– Corrugation	—	< 3 mm
Tube:	50 micron	200 micron
Power Required:	15 KW	
Speed:	12000 cartons upto 350 mm length 6000 cartons above 350 mm length	
Floor Space:	2.5 x 5.75 meters	
Weight:	3100 kg	



A Joint Venture of

**Grafik Machinery International**

F-289, Flatted Factory Complex,  
Okhla-III, New Delhi-110020.

Website: [www.grafikmachinery.com](http://www.grafikmachinery.com)



**SLKCG Pvt. Ltd.**

257/260, Udyog Bhavan, Sonawala Road,  
Goregaon East, Mumbai-400063.

Website: [www.slkcg.com](http://www.slkcg.com)

Technical Specifications, Features & Images are subject to change without notice.